



## THE UNIVERSAL STEEL COMPANY

6600 Grant Avenue • Cleveland, Ohio 44105

[www.univsteel.com](http://www.univsteel.com)

800-669-2645



Universal Steel now  
offers three different  
processes to provide you  
with the level flat rolled  
steel that works best for  
your application.

1

### The Memory Eraser

New stretcher leveler will  
provide material up to  
3/4" x 74" that is perfectly  
flat, Memory Free and  
stays that way.



2

### The Shape Corrector

Our coil to coil Shape  
Corrector eliminates shape  
problems in steel up to 72"  
wide, 0.056" to 0.160".



3

### Precision Leveling

Capabilities across the  
entire range. Widths to 74",  
gauges from .028" to 1/2".



Relax and look into the circle...  
You are getting very tired...  
(of processing problems caused by steel memory.)



You **WILL** try  
Memory Free sheets from Universal

# Get MEMORY FREE SHEETS, with mind-boggling flatness from Universal's NEW MEMORY ERASER



## WHY STRETCH-LEVELING?

Because it produces the flattest, most stable material possible. Unlike leveling or temper rolling, our Memory Eraser not only flattens but also stretches material past its yield point in order to eliminate memory. Shape problems and processing problems disappear.

## NO STRESS. NO PROBLEMS.

Universal's Memory Free sheets have zero memory. There's no spring-back, no warping. You get stress-free material. Memory Free sheets are ideal for fabrication requiring laser or plasma cutting.

## GREATER SPEED & PROFITS

Memory Free sheets run at faster speeds with lower rejects and less scrap. Expect to see your productivity and profits to go up.



## A DISCRETE ALTERNATIVE

If you're now using discrete plate, Universal can provide you with up to 3/4" Memory Free plate with far shorter lead times and lower costs.




## WE CAN DO THAT.

Give us your toughest stuff. The Memory Eraser can handle it. We can process material up to 3/4" x 74", including HS steels beyond 100,000 psi yield.


Ready to learn more?  
Call us at 800-669-2645 Ext. 230



Stretcher unit is now in place as well as the shear, stacker and exit tables. Next step: electrical/hydraulic work, controls and testing.

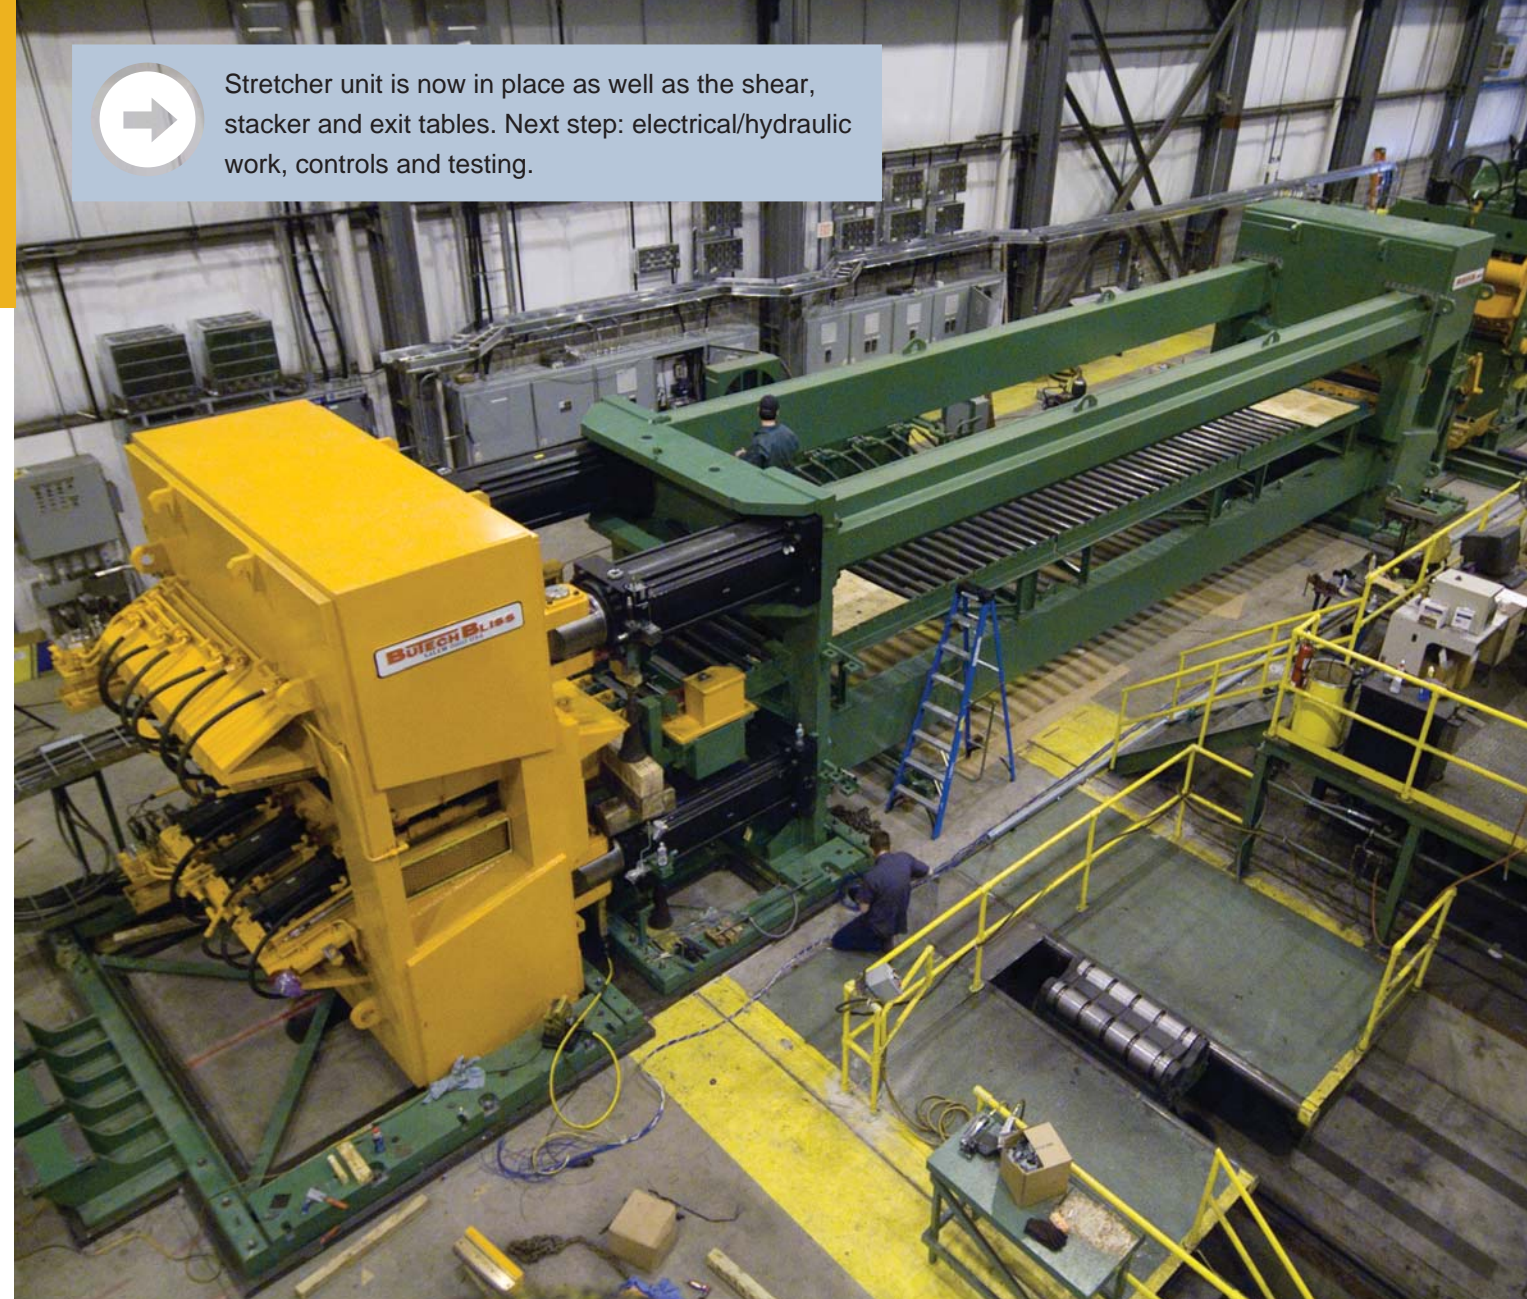

STRETCHER LEVELER

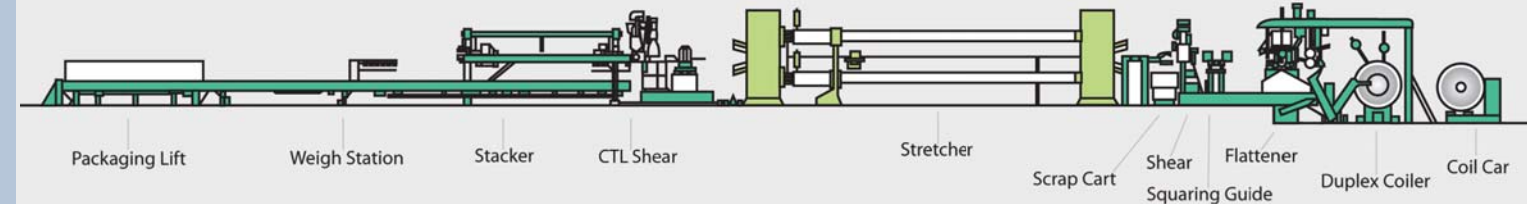

THE UNIVERSAL  
STEEL COMPANY

## CONSTRUCTION TIMELINE

### March

Equipment has all been delivered to the site and placed in position.

### April

Completion of installation and testing.

### May

Start-up and commissioning.



THE UNIVERSAL  
STEEL COMPANY

www.univsteel.com